

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 January 2005 (06.01.2005)

PCT

(10) International Publication Number
WO 2005/001865 A1

(51) International Patent Classification⁷: **H01H 13/70**,
A41D 1/00

(74) Common Representative: **KONINKLIJKE PHILIPS
ELECTRONICS, N.V.**; c/o WAXLER, Aaron, P.O. Box
3001, Briarcliff Manor, NY 10510-8001 (US).

(21) International Application Number:
PCT/IB2004/051015

(22) International Filing Date: 25 June 2004 (25.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/483,773 30 June 2003 (30.06.2003) US

(71) Applicant (for all designated States except US): **KONIN-
KLIJKE PHILIPS ELECTRONICS, N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **MARMAROPOU-
LOS, George** [GR/US]; P.O. Box 3001, Briarcliff Manor,
NY 10510-8001 (US). **VU, Giang, T.** [GB/US]; P.O.
Box 3001, Briarcliff Manor, NY 10510-8001 (US). **PUL-
FORD, Katharine** [GB/GB]; P.O. Box 3001, Briarcliff
Manor, NY 10510-8001 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A PRESSURE ACTIVATED INTERFACE

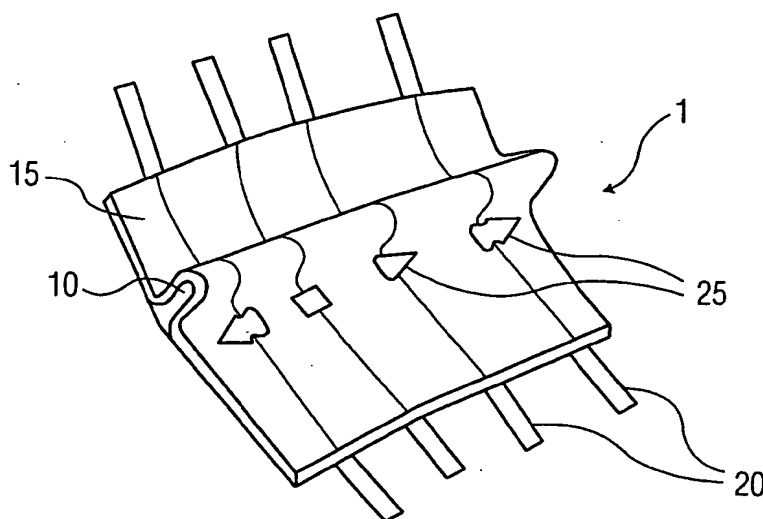

(57) Abstract: There is provided a flexible, lightweight high-performance pressure activated interface (1) that can cooperate with a variety of different textiles as well as with any of a variety of different electronic devices/systems without compromising characteristics of the different textiles. The interface (1) having a textile construction with one or more collapsible cavities (10). The collapsible cavities (10) having one or more conductive contact areas (30) associated with one or more leads (20) and situated such that at least two of the one or more conductive contact areas (30) can electrically communicate via a mechanical interaction. The at least two of the one or more conductive contact areas (30) being elevated relative to the one or more leads (20).

WO 2005/001865 A1

**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE,

IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 2005/001865

PCT/IB2004/051015

1

A PRESSURE ACTIVATED INTERFACE

The present invention relates to textile electronics. More particularly, the present invention relates to an interface having one or more pressure activated switches preferably integrated into a flexible fiber construction. The pressure activated interface is preferably
5 operative via a mechanical interaction and functional in various electronic applications and/or operations.

The use of electronics in various manufactured materials is well known; see for example, U.S. Patent Nos. 6,360,615 B1, 6,210,771 B1, and 5,371,326; U.S. Patent Application Publication No. 2002/0135457 A1; PCT International Patent Publication Nos.
10 WO 02/055923 A1 and WO 02/32665 A1; and/or UK Patent Application No. GB 2 373 863. Devices such as conductive traces, bio-sensors, electrodes, computers, electronic circuits and the like have all been incorporated into textiles. As the benefits associated with the various types and/or configurations of textile electronics become more apparent, the desirability and need for simple, effective and efficient, as well as intuitive user interface
15 solutions becomes more apparent. Hence, there is a need for an input device or interface that is complementary to the various electronic functions/systems provided by the different textile electronics and/or the materials accommodating such electronics.

It is an object of the present invention to provide an interface suitable to address the above-identified need for simple, effective and efficient, as well as intuitive user interface
20 solutions.

It is another object of the present invention to provide such an interface that has a flexible textile construction.

It is another object of the present invention to provide such an interface having one

WO 2005/001865

PCT/IB2004/051015

2

or more switches and corresponding interface graphics.

It is another object of the present invention to provide such an interface having one or more switches easily manufactured using conventional textile fabrication methods.

It is another object of the present invention to provide such an interface that is
5 cooperative with a garment and/or one or more textile electronic devices or equipment.

It is another object of the present invention to provide such an interface operatively connectable or cooperative with a variety of electronic devices/systems.

It is still another object of the present invention to provide such an interface for accomplishing a variety of different electronic operations or functions.

10 These and other objects and advantages of the present invention are achieved by an interface having a textile construction with one or more collapsible spaces or cavities therein. The one or more collapsible cavities are preferably fashioned so as to be raised or elevated from the surface of the textile interface. Preferably, one or more strips or leads have one or more conductive contact areas associated therewith and cooperative with the
15 textile interface such that at least two of the one or more conductive contact areas can electrically communicate via a mechanical interaction.

This mechanical interaction preferably causes the at least two conductive areas to be in conductive communication and thereby close one or more circuits or switches, which switch can in turn actuate an associated electronic function/operation. Thus, the interface of
20 the present invention preferably facilitates accomplishing one or more intuitive electronic functions/operations. The intuitive interface is preferably in parallel with the properties or

WO 2005/001865

PCT/IB2004/051015

3

characteristics of the textile construction. Also, one or more switches of the textile interface can be made to be impermeable should waterproofing and/or insulating be required for a particular interface solution.

Fig. 1 is a perspective view of a pressure activated interface in accordance with an
5 illustrative embodiment of the present invention;

Fig. 2 is a section view of a switch in accordance with an illustrative embodiment of the present invention;

Fig. 3 is a perspective view of a pair of leads in accordance with an illustrative embodiment of the present invention;

10 Fig. 4 is a perspective view of an interface in accordance with another illustrative embodiment of the present invention;

Fig. 5 is a perspective view one or more leads in accordance with another illustrative embodiment of the present invention; and

Fig. 6 is a section view of a switch in accordance with another illustrative
15 embodiment of the present invention; and

Fig. 7 is a front view of a garment incorporating the pressure activated interface of Fig. 1.

Referring to the drawings and, in particular, Fig. 1, a textile mesh or construction in accordance with an illustrative embodiment of the interface present invention is shown and
20 generally represented by reference numeral 1. Preferably, textile construction or interface 1 has

WO 2005/001865

PCT/IB2004/051015

4

one or more collapsible spaces or cavities 10. The one or more collapsible cavities 10 are preferably fashioned to be elevated or raised from a surface 15 of the textile construction or interface 1. The textile interface 1 being integral with and/or cooperative with one or more other textiles, such as for example, those used in garments or upholstery. The textile interface 1
5 preferably also has one or more strips or leads 20 cooperative therewith. Interface graphics 25 can also be patterned or printed on the textile interface 1 so as to be associated with the one or more collapsible cavities 10. Preferably, the interface graphics 25 are suitable for easing user interpretation of various functions/operations associated with various types of textile electronics and like devices. It is noted that the interface graphics 25 can be either part of
10 and/or integral with an abstract or decorative pattern associated with a textile.

Referring to Figs. 1 and 2, the one or more collapsible cavities 10 are preferably integral with the textile interface 1. However, the one or more collapsible cavities 10 may also be separately connectable with the textile interface 1 via any known method/process for accomplishing such a task. The one or more collapsible cavities 10 may be fashioned from any
15 suitable material, natural and/or manmade. For example, the one or more collapsible cavities 10 can be formed from a plasticized fiber or material to provide rigidity. Also, the one or more collapsible cavities 10 may be reinforced with a support or base element 13 which can preferably be injection molded to provide improved strength and support. Other configurations and/or arrangements may also be used in forming the textile interface 1 and/or the one or more
20 collapsible cavities 10 thereof.

Referring to Figs. 2 and 3, the one or more leads 20 are preferably elongated strips of at least one flexible fiber, cable and/or wire having one or more conductive contact areas 30

WO 2005/001865

PCT/IB2004/051015

5

associated therewith. The one or more leads 20 can be formed from any material, natural and/or manmade, suitable to provide sufficient flexibility and durability to withstand the stresses associated with the manufacture and/or the handling thereof. Examples of such materials include, flexible metal coated materials including woven, non-wovens, and/or knits, 5 filaments, foils, and yarns, conductive polymer coated fibers/materials, conductive graphitized materials, and/or conductive gel coated materials.

The one or more leads 20 and/or the one or more conductive contact areas 30 can be operative to facilitate electrical communication between and/or among various electronic devices, systems and/or power sources 35 via the textile interface 1. A connector 40 10 preferably can also be used to provide a medium for electrical communication between various electronic devices, systems, and/or power sources 35 and the textile interface 1. The connector 40 can have any configuration suitable to provide the effective means of electrical communication.

Referring to Fig. 2, the one or more conductive contact areas 30 are preferably in 15 the one or more collapsible cavities 10 so as to be raised relative to the surface 15 of the textile interface 1 and have a fluid space 33 therebetween. The one or more leads 20 and/or the one or more conductive contact areas 30 thereof are preferably biased apart so that the one or more conductive contact areas 30 are innately disconnected. The bias of the one or more leads 20 and/or the one or more conductive contact areas 30 may be overcome via a 20 mechanical interaction, such as for example, a force (F) being applied as shown in Fig. 2. The mechanical interaction can be either directly or indirectly applied by a user. Preferably, the mechanical interaction causes the one or more collapsible cavities 10 to collapse and the

WO 2005/001865

PCT/IB2004/051015

6

one or more conductive contact areas 30 to be connected or in conductive communication to close one or more circuits or switches 5.

Referring to Figs. 4 through 6, in an alternative illustrative embodiment the one or more collapsible cavities 10 are preferably fashioned along the edge or perimeter 17 of the textile interface 1. The textile interface 1 being integral with and/or cooperative with one or more other textiles, such as for example, those used in garments or upholstery. The one or more collapsible cavities 10 in this alternative embodiment preferably have at least some, if not all, of the elements and/or features previously identified and discussed with respect to the foregoing embodiment. However, in this embodiment the one or more leads 20 and/or the one or more conductive contact areas 30 preferably cooperate with a conductive plane 50 to accomplish the electrical communication between the one or more conductive contact areas 30 and the closing of the one or more circuits or switches 7, which in turn can bring about an associated electronic operation/function.

Having described some of the preferred characteristics of the present invention, the method or process of forming a pressure activated user interface preferably includes at least the following steps. Fashioning a textile mesh or construction 1 having one or more user intuitive interface graphics 25 by any known method for accomplishing such construction (e.g., sewing, knitting and/or weaving). Either simultaneously or subsequently to the fashioning of the textile construction 1, fashioning one or more collapsible cavities 10 with one or more conductive contact areas 30 situated therein. Either simultaneously or subsequently to the fashioning of the one or more collapsible cavities 30, providing rigidity or reinforcement to the one or more collapsible cavities 30.

WO 2005/001865

PCT/IB2004/051015

7

It is noted that the one or more conductive contact areas 30, additionally and/or alternatively to being associated with the one or more leads 20, may also be fashioned from a conductive material directly on the underside of the textile interface 1 in the one or more collapsible cavities 10 such that when a mechanical interaction (e.g., force F) is applied the one or more conductive contact areas 30 are brought together to be in electrical communication and/or to close a switch or circuit. Also, the textile interface 1 can have one or more securing mechanisms 55, such as that shown in Fig. 7, for selectively holding said one or more collapsible cavities 10 closed.

It is further noted that the one or more collapsible cavities 10 and/or the fluid space 33 may be at least partially filled with a gas, liquid and/or semi-liquid material or substance suitable for providing support and/or any other desired characteristic to the one or more collapsible cavities 10 and for allowing the one or more collapsible cavities 10 to collapse or close the fluid space 33 such that the one or more conductive contact areas 30 are brought into electrical communication.

It is still further noted that the one or more collapsible cavities 10 and/or the entire textile interface 1 can be made sufficiently impermeable to accomplish any waterproofing and/or insulating required for any of a variety of desired interface solutions.

Thus, the textile interface 1 preferably has properties suitable to provide sufficient flexibility and durability to withstand the stresses associated with manufacture and handling thereof. Thus, the interface 1 is preferably a highly flexible/resilient, lightweight high-performance intuitive user interface cooperative with various different textile electronics that can be integral with and/or connected to different textiles, such as a garment 60 as

WO 2005/001865

PCT/IB2004/051015

8

shown in Fig. 7, without compromising the innate characteristics of such textiles.

The present invention having been thus described with particular reference to the preferred forms thereof, it will be obvious that various changes and modifications may be made therein without departing from the spirit of the present invention as defined herein.

WO 2005/001865

PCT/IB2004/051015

9

WHAT IS CLAIMED IS:

1. A pressure activated interface 1, comprising:

a textile construction having one or more collapsible cavities (10) and one or more
conductive contact areas (30) associated with one or more leads (20),

5 wherein at least two of said one or more conductive contact areas (30) are in said
one or more collapsible cavities (10) and are elevated relative to said one or more leads
(20).
2. The interface (1) of claim 1, wherein the at least two of said one or more
conductive areas (30) in said one or more collapsible cavities (10) are biased apart.
- 10 3. The interface (1) of claim 2, wherein said bias can be overcome a mechanical
interaction.
4. The interface (1) of claim 3, wherein said mechanical interaction causes said
one or more collapsible cavities (10) to be collapsed and said at least two of said one or
more conductive contact areas (30) to be connected or in conductive communication to
15 close a switch (5).
5. The interface (1) of claim 4, wherein said switch (5) is cooperative with any
of a variety of electronic devices and/or is incorporable in a garment or upholstery (60).
6. The interface 1 of claim 1, further comprising one or more interface graphics
(25) associated with the one or more collapsible cavities (10).
- 20 7. The interface (1) of claim 1, wherein said one or more collapsible cavities
(10) are fashioned a relatively rigid material.

WO 2005/001865

PCT/IB2004/051015

10

8. The interface (1) of claim 1, wherein said one or more collapsible cavities (10) are reinforced via a support element (13).

9. The interface (1) of claim 8, wherein said support element (13) is injection molded to provide support to said one or more collapsible cavities (10).

5 10. The interface (1) of claim 1, wherein the interface (1) is formed using any conventional textile fabrication method.

11. The interface (1) of claim 1, wherein said one or more conductive contact areas (30) are fashioned from said one or more leads (20).

12. The interface (1) of claim 11, wherein said one or more leads (20) are
10 integral with said one or more collapsible cavities (10).

13. The interface (1) of claim 1, further comprising one or more securing mechanisms (55) for selectively holding said one or more collapsible cavities (10) closed.

14. A method for forming a pressure activated interface (1) comprising the steps of:

15 fashioning a textile construction (1) having one or more user intuitive interface graphics (25) patterned thereon;

simultaneously or subsequently fashioning one or more collapsible cavities 10 with one or more conductive contact areas (30) therein; and

simultaneously or subsequently providing said one or more collapsible cavities (10)

WO 2005/001865

PCT/IB2004/051015

11

with reinforcement.

15. The method of claim 14, wherein said one or more collapsible cavities (10) and said one or more conductive contact areas (30) are raised to accommodate a mechanical interaction.

5 16. The method of claim 14, wherein said one or more conductive contact areas (30) are associated with one or more leads (20), which in turn are operatively connectable with any of a variety of electronic devices and/or systems.

17. The method of claim 14, further comprising the step of incorporating said interface (1) into a garment (60).

10 18. A flexible interface (1) comprising:

a textile construction with one or more collapsible cavities (10) along an edge or perimeter (17) thereof;

a conductive plane (31) in said one or more raised collapsible cavities (10); and

15 one or more leads (20) with one or more conductive contact areas (30) conductively cooperative with said conductive plane (31) in response to a mechanical interaction.

19. The interface (1) of claim 18, wherein said mechanical interaction causes the collapse of said collapsible cavities (10) thereby bringing said conductive plane (31) and said one or more conductive contact areas (30) into conductive communication to close a switch (5), said switch (5) being cooperative with any of a variety of electronic devices and/or is
20 incorporable in a garment or upholstery (60).

WO 2005/001865

PCT/IB2004/051015

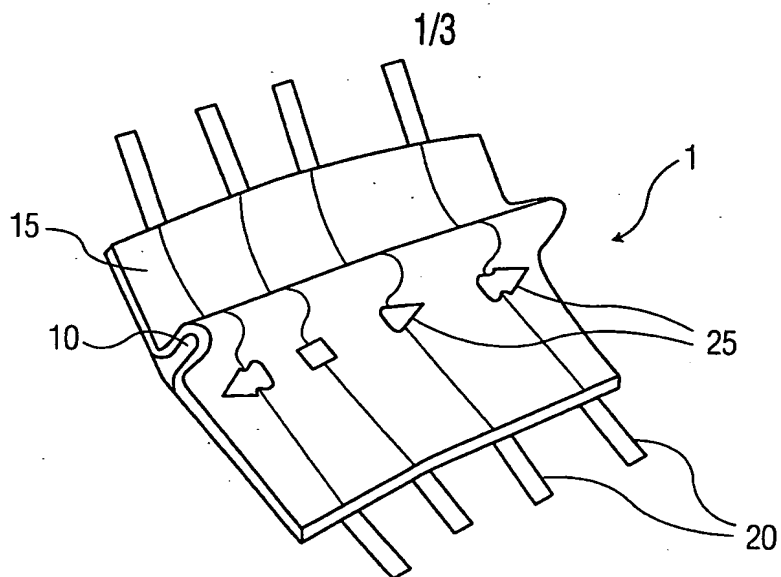


FIG. 1

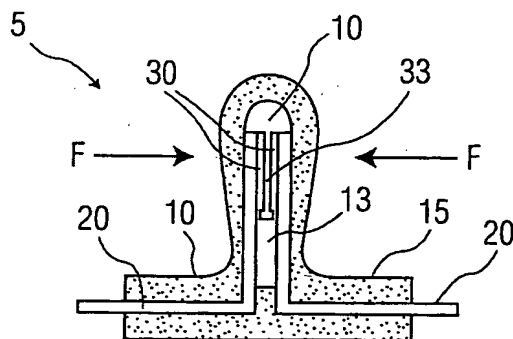


FIG. 2

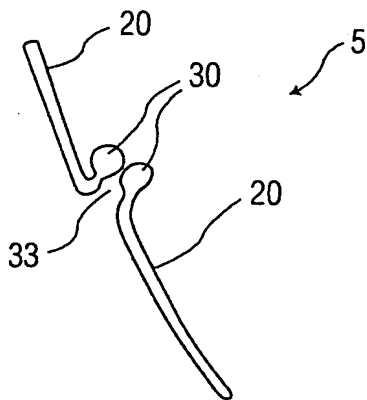


FIG. 3

WO 2005/001865

PCT/IB2004/051015

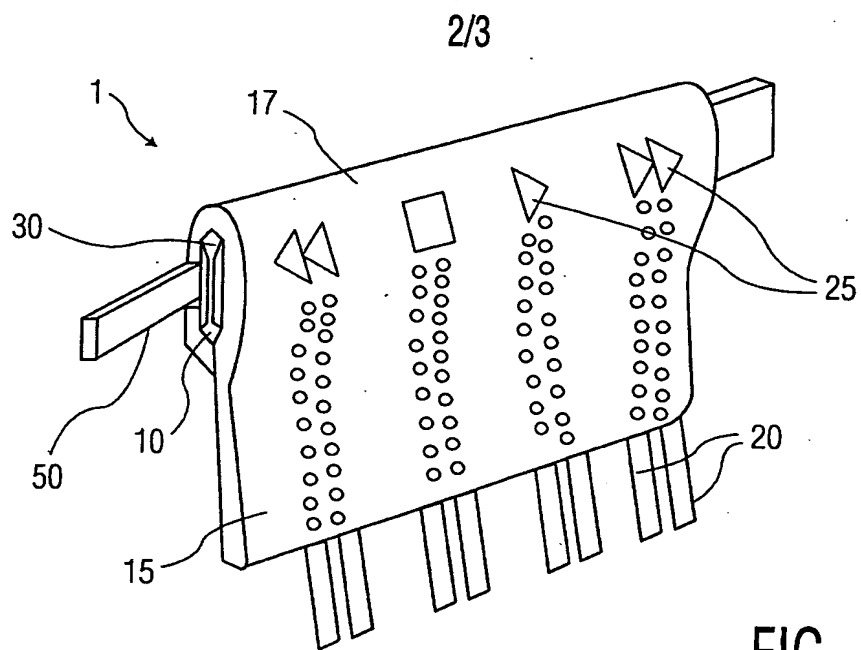


FIG. 4

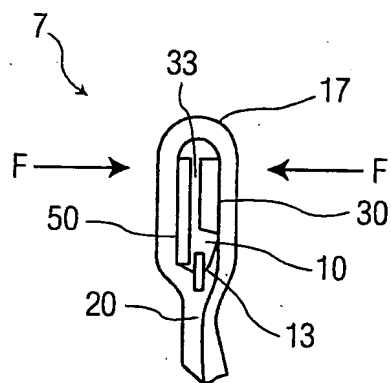


FIG. 5

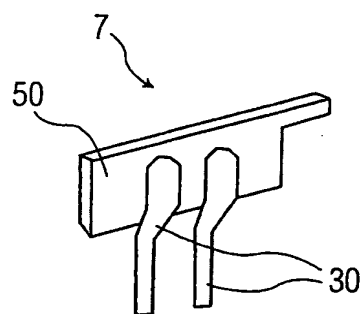


FIG. 6

WO 2005/001865

PCT/IB2004/051015

3/3

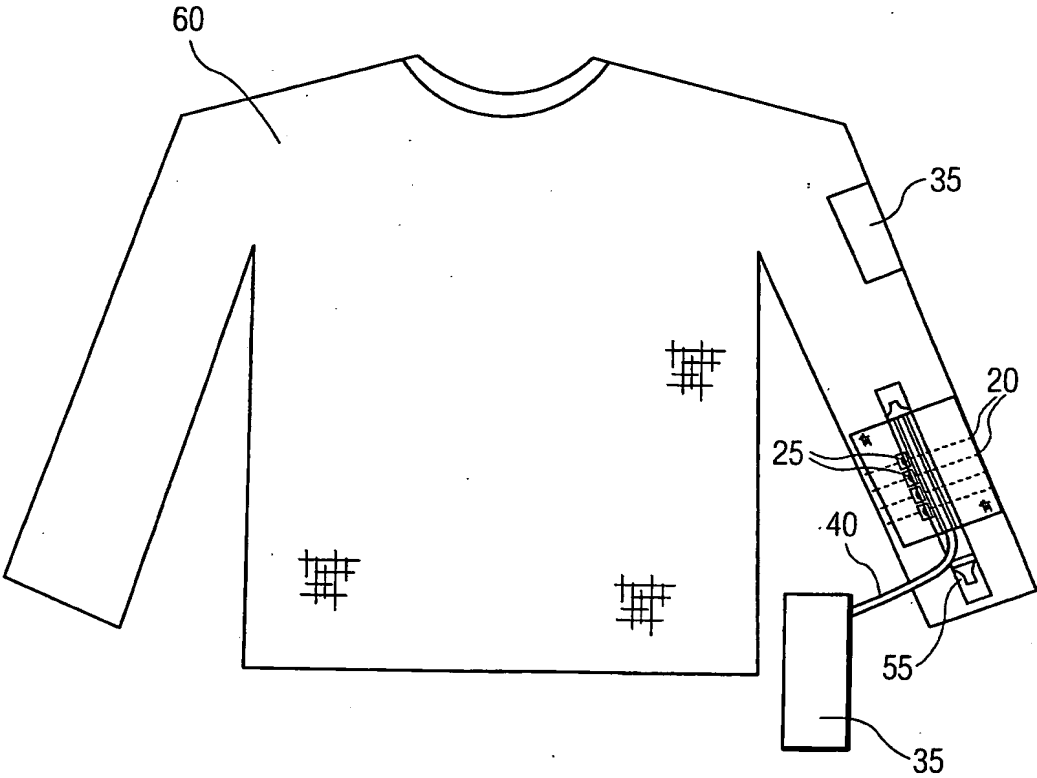


FIG. 7

INTERNATIONAL SEARCH REPORT

Inte ial Application No
PCT/IB2004/051015

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01H13/70 A41D1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01H A41D H01B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 833 403 A (FRANCE TELECOM) 13 June 2003 (2003-06-13) page 1, line 1 - line 11 page 7, line 28 - page 10, line 5; figures 2,3	1-19
P,X	WO 03/094187 A (PULFORD KATHARINE ; WAGNER PHILIPPA C (GB); KONINKL PHILIPS ELECTRONIC) 13 November 2003 (2003-11-13) page 6, line 3 - page 12, line 22; figures 4,5a,5b,6,7a,7b	1-13,18, 19
X	US 2 445 660 A (BRUESTLE CARL O) 20 July 1948 (1948-07-20) the whole document	1,18

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

15 October 2004

Date of mailing of the international search report

29/10/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ramírez Fueyo, M

INTERNATIONAL SEARCH REPORT

Int: nal Application No
PCT/IB2004/051015

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 178 488 A (AUDI NSU AUTO UNION AG) 23 April 1986 (1986-04-23) the whole document	14
A	US 5 742 241 A (CROWLEY ROBERT J ET AL) 21 April 1998 (1998-04-21) the whole document	1,18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB2004/051015

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2833403	A	13-06-2003	FR 2833403 A1	13-06-2003
			WO 03050832 A1	19-06-2003
WO 03094187	A	13-11-2003	WO 03094187 A1	13-11-2003
US 2445660	A	20-07-1948	NONE	
EP 0178488	A	23-04-1986	DE 3437644 A1	30-04-1986
			EP 0178488 A2	23-04-1986
US 5742241	A	21-04-1998	US 5459461 A	17-10-1995
			US 5642109 A	24-06-1997
			US 2002109613 A1	15-08-2002
			WO 9714217 A1	17-04-1997
			US 5648771 A	15-07-1997
			US 5666112 A	09-09-1997
			US 6313762 B1	06-11-2001
			US 5691716 A	25-11-1997
			US 6052071 A	18-04-2000